


# AKS120-120

- Connector from Al conductor to Cu conductor.
- Stranded/solid Al conductors, stranded/multi-stranded Cu conductors.
- For multi-stranded Cu conductors, contact crimping using the Dual system is recommended.
- Two crimps are required for Al, normally one for Cu.



AlCu through connector, from Al conductor to Cu conductor. For stranded Al cable 120 mm<sup>2</sup>, or for solid Al cable 150 mm<sup>2</sup>, to stranded/multi-stranded Cu cable 120 mm<sup>2</sup>. When crimping the Cu section, place the dies between the mark on the sleeve and the edge of the Cu section. Used with Elpress certified systems V1300, V250.

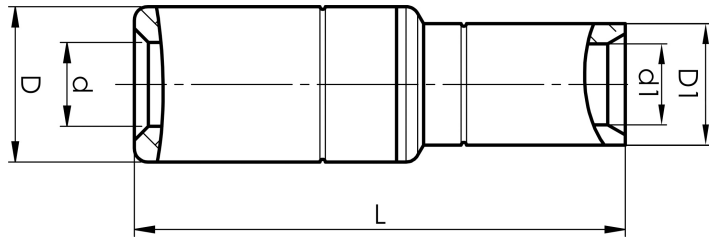

Item number: **7333-401800**

EAN: **7393487009851**

s1 (mm): **30**  
d (mm): **14**  
D (mm): **25**  
L (mm): **98.5**  
s (mm): **61**  
d1 (mm): **17**  
D1 (mm): **22**

AWG/MCM Stranded Al: **250 MCM**  
AWG/MCM Solid Al: **300 MCM**  
AWG/MCM Cu: **250 MCM**  
mm<sup>2</sup> Stranded Al: **120**  
mm<sup>2</sup> Solid Al: **150**  
mm<sup>2</sup> Cu: **120**