

# KRF300A-12X2-40


- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole.
- For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.
- UL-approved, DNV approved.

## Example of marking KRF: 17 (neck) Elpress logotype 70 10F (palm)

17 = Die No. 70 = mm<sup>2</sup> 10 = palm hole for M10 F = type KRF for stranded and flexible conductors.

2 holed tube terminal for multi-stranded (class 5) and stranded (class 2) Cu-conductors (acc. to IEC 60228), 300 mm<sup>2</sup>, with two M12 holes in the palm.

Used with Elpress certified systems V1300 or V250.

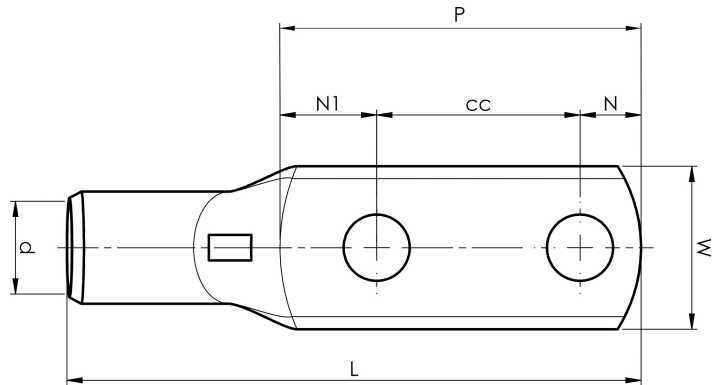

Item number: **7301-240900**

EAN: **7393487043190**

W (mm): **46**

t (mm): **6.8**

N (mm): **12**

N1 (mm): **22**

P (mm): **74**

cc (mm): **40**

f (mm): **1.75**

d (mm): **24.5**

D (mm): **31,5**

L (mm): **133**

s (mm): **40**

Screw: **M12x2**

Inspection hole: **Yes**

AWG/MCM Cu: **550 MCM**

mm<sup>2</sup> Cu: **300**