


Ring terminals 0.1 - 6 mm<sup>2</sup>, Ring terminals 0.1 - 6 mm<sup>2</sup>

# A1510R

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- Insulation halogen-free PC, Easy-entry.

Pre-insulated ring terminal for 0.5-1.5 mm<sup>2</sup> cable.  
Used with certified tool GSA0760.

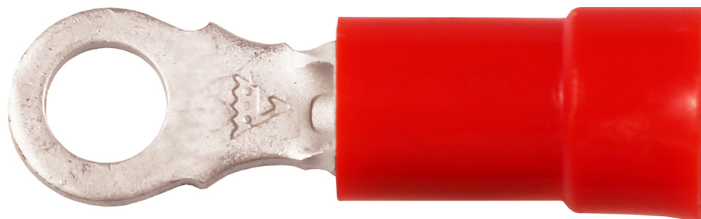

Item number: **7278-061100**

EAN: **7393487004153**

W (mm): **16.5**

t (mm): **0.7**

d (mm): **4**

L1 (mm): **22**

L (mm): **30.5**

s (mm): **7**

Insulation material: **PC**

Insulation colour: **Red (insulated terminals)**

Material: **Cu, Cu/Sn**

Easy-entry: **Yes**

Screw: **M10**

AWG/MCM Cu: **20 - 16 AWG**

mm<sup>2</sup> Cu: **0,5-1,5**