


Joining sleeves 0.75 - 10 mm<sup>2</sup>, KS/KSF through connectors 0.75 - 800 mm<sup>2</sup>

# KS4

- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole and int. cable stop.
- For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.

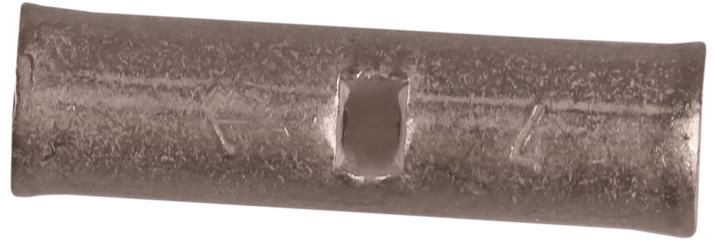

Uninsulated through connector for multi-stranded (class 5) and stranded (class 2) Cu conductors, 4 mm<sup>2</sup>. Used with certified tool GWB4099 or ES2258.



Item number: **7303-000500**

EAN: **7393487007864**

d (mm): **3**

D (mm): **5**

L (mm): **19**

s (mm): **9**

AWG/MCM Cu: **12 AWG**

mm<sup>2</sup> Cu: **4**