Through connectors with aluminium partitions with different areas 16 - 400 mm²

AS185-95

Al through connector with partition for stranded Al cable 185-95 mm², or for solid Al cable 240-120 mm². Used for splicing Al conductors of different areas. Used with Elpress certified systems V1300, V250.

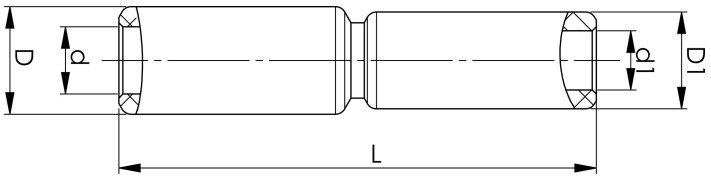

Item number: **7313-409500**
EAN: **7393487009288**

s1 (mm): **60**
d (mm): **17.6**
D (mm): **32**
L (mm): **131.9**
s (mm): **61**
d1 (mm): **12.5**
D1 (mm): **25**

AWG/MCM Stranded Al: **3/0 AWG - 350 MCM**
AWG/MCM Solid Al: **500250**
mm² Stranded Al: **185-95**
mm² Solid Al: **240-120**

Image not found or type unknown