


# T2600B

- opening for easy die changes and for quick removal after splicing
- crimp die (TB7) is available for solid Cu conductors, type Excel or similar
- crimp force approx. 57 kN
- advanced force ratio for lowest handle force
- easy to work with in confined spaces
- quick feed function



Tested and certified mechanical hand-held tools for contact crimping Cu terminals, type KRD/KSD 10-120 mm<sup>2</sup>, Al terminals 16-25 mm<sup>2</sup> (-35 solid), and C-sleeves 6/6-25/25 mm<sup>2</sup>.

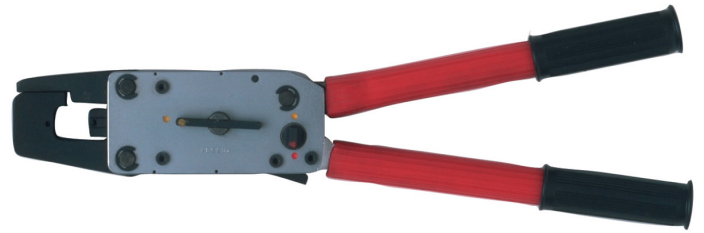

Item number: **5103-005200**

EAN: **7393487000056**

Delivery box: **Metal box**

Crimp geometries: **Punch, Hexagonal, Oval**

AWG/MCM Cu: **8 - 4/0 AWG**

mm<sup>2</sup> Solid Al: **35**

mm<sup>2</sup> Cu: **10-120**

Crimp range Cu-terminals min (mm<sup>2</sup>): **10**

Crimp range Cu-terminals max (mm<sup>2</sup>): **120**

Crimp range C-connectors min (mm<sup>2</sup>): **6/6**

Crimp range C-connectors max (mm<sup>2</sup>): **25/25**

Crimp range Al-terminals min (mm<sup>2</sup>): **16**

Crimp range Al-terminals max (mm<sup>2</sup>): **25**