


Ring terminals 0.1 - 6 mm²

A2510R

- Material: Cu 99.95%, tin plated Cu/Sn, brazed neck.
- Insulation halogen-free PC, Easy-entry.

Pre-insulated ring terminal for 1.5-2.5 mm² cable.
Used with certified tool GSA0760.

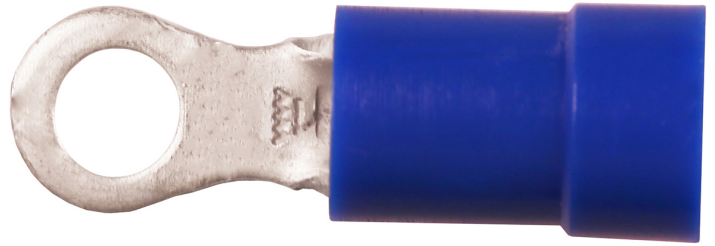

Item number: **7278-061600**

EAN: **7393487004160**

W (mm): **16.5**

t (mm): **0.75**

d (mm): **4.5**

L1 (mm): **22**

L (mm): **30.5**

s (mm): **8**

Insulation material: **PC**

Insulation colour: **Blue (insulated terminals)**

Material: **Cu, Cu/Sn**

Easy-entry: **Yes**

Screw: **M10**

AWG/MCM Cu: **16 - 14 AWG**

mm² Cu: **1,5-2,5**