


Jointing sleeves 0.75 - 10 mm², KS/KSF through connectors 0.75 - 800 mm²

KS6

- Material: Cu 99.95%, tin plated Cu/Sn.
- Inspection hole and int. cable stop.
- For stranded (class 2) and multi-stranded (class 5) Cu conductors, for multi-stranded Cu conductors contact crimping using the Dual system is recommended.
- UL-approved.

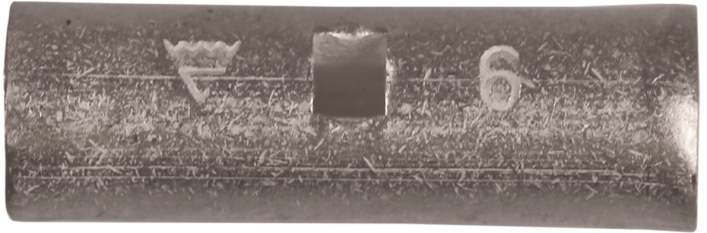

Uninsulated through connector for multi-stranded (class 5) and stranded (class 2) Cu conductors, 6 mm². Used with certified tool GWB4099 or ES2258.



Item number: **7303-000600**

EAN: **7393487007871**

d (mm): **4**

D (mm): **6**

L (mm): **19**

s (mm): **9**

AWG/MCM Cu: **10 AWG**

mm² Cu: **6**